

STEEL CEMENTITIOUS PANEL

全钢高架活动地板



ZT60 OA PANEL ZT60 OA地板




Structure

ZT60 OA panel is made of steel plate, top to be SPCC material, bottom to be ST14 material, after pan formed and joined together by resistance welding, the panel is coated with epoxy paint, then filled with light cement.

ZT60 OA地板由冷轧钢板和拉伸钢板构成，板内填充轻质发泡水泥。用宝钢板经拉伸、点焊、磷化、喷漆做成，内腔填充发泡水泥，带有角锁孔。

Product property

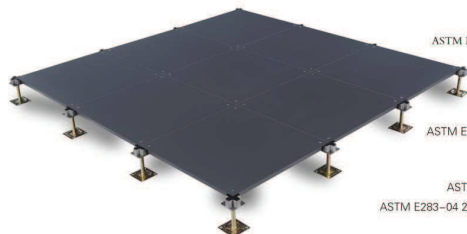

Panel weight : 12~22kg/pc
ASTM E136-11 and BS476-4: Non combustible
ASTM E84-14: Class A
EN13501: Class A1
ASTM E492-09: IIC58
ASTM E283-04 25Pa $\leq 0.3L/s \cdot m^2$
NIOH9002: Asbestos-free
LEED assessment report
地板自重12~22KG/片
ASTM E136-11和BS476-4不可燃
ASTM E84-14防火A级
EN13501-1防火A1级
ASTM E492-09隔音等级IIC58
ASTM E283-04 25Pa漏风值小于0.3L/s · m²
(配中天机房横梁控制)
NIOH 9002 无石棉成分检出
提供LEED贡献值第三方评估报告

05

SPCC steel SPCC冷轧硬板


Light cement 发泡水泥

ST14 steel ST14拉伸钢板



Structure

- Screw down design supports the system effectively and makes the installation easy and stable.
- The load is transferred directly onto the center of pedestal column.
- Different types of understructures are available for install OA panel system.
- 角锁孔连接使地板安装更稳固，更好地支撑地板系统。
- 地板承载力通过角锁支架均匀分散。
- 有不同种类支架系统可供选择安装OA地板。



Type	Size	Concentrated	Impact Load	Ultimate Load	Uniform Load	Rolling Load	Standard
型号	尺寸	集中载荷	冲击载荷	极限载荷	均布载荷	滚动载荷	标准
International	mm	N	N	N	N/m ²	10次	10000次
SC668	HDG600 350D	600 × 600 × 35	≥3000	670	≥9000	≥12500	2200 1500
SC800	HDG600 350D	600 × 600 × 35	≥3600	670	≥10800	3000 2200	
SC1000	HDG610 350D	610 × 610 × 35	≥4500	670	≥13600	3600 3000	
SC1250	HDG600 352D	600 × 600 × 35	≥5600	670	≥16800	4500 3800	
SC1500	HDG610 352D	610 × 610 × 35	≥6700	670	≥20100	5600 4500	
SC2000	HDG600 352D	600 × 600 × 35	≥8900	780	≥26700	6700 5600	
SC2500	HDG600 352D	600 × 600 × 35	≥11100	780	≥33300	8900 6700	
SC3000	HDG610 352D	610 × 610 × 35	≥13300	880	≥39900	11100 8900	

06

STEEL CEMENTITIOUS PANEL

全钢高架活动地板



LAMINATE PANEL 贴面地板



Feature



- Used for computer rooms, data center and communication center
- Excellent rolling load & ultimate load performance
- Light weight cement makes panels solid and quiet
- Black/grey epoxy paint finish for long time protection
- Class A flame spread and smoke development rating
- Convenient installation supplies an excellent solution for office integrity, wiring and data cable service
- 适用于计算机房、数据中心、通讯中心
- 滚动载荷与极限载荷强
- 轻质水泥填充
- 黑/灰色环氧美观且使用寿命长
- 防火A级
- 便于安装、布线，维护机房整体性

Wide range finishes available 贴面材料



- High Pressure Laminate
- Conductive vinyl tile
- Ceramic
- Carpet tile
- Linoleum
- Granite/Marble
- 防火板
- 导电PVC
- 瓷砖
- 地毯
- 亚麻地材
- 花岗岩/大理石

07

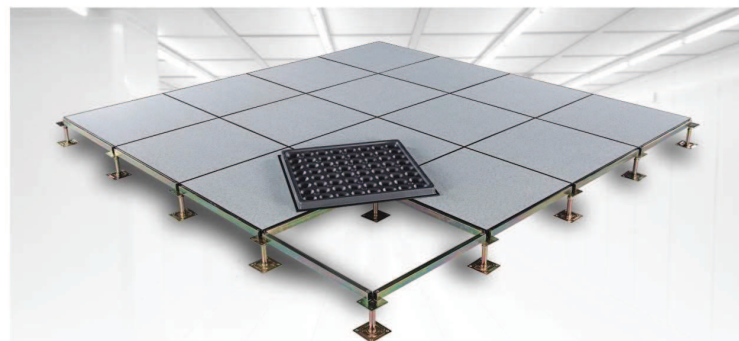

08